


Date	Rev. date	Work nr.	Drw. nr.	Rev.
Drawn by Ruukki	Rev.	M30/S23-b	-	
Scale 1:3	Building	File nr. P2001/003-00040		

Hidden fixing requires to use EA1B61CN15015. fastener.
In case of fixing sandwich panel with two fasteners distance between them should be at least 50 mm.
Quantity of fastners should be calucaulated by using program TrayPan.

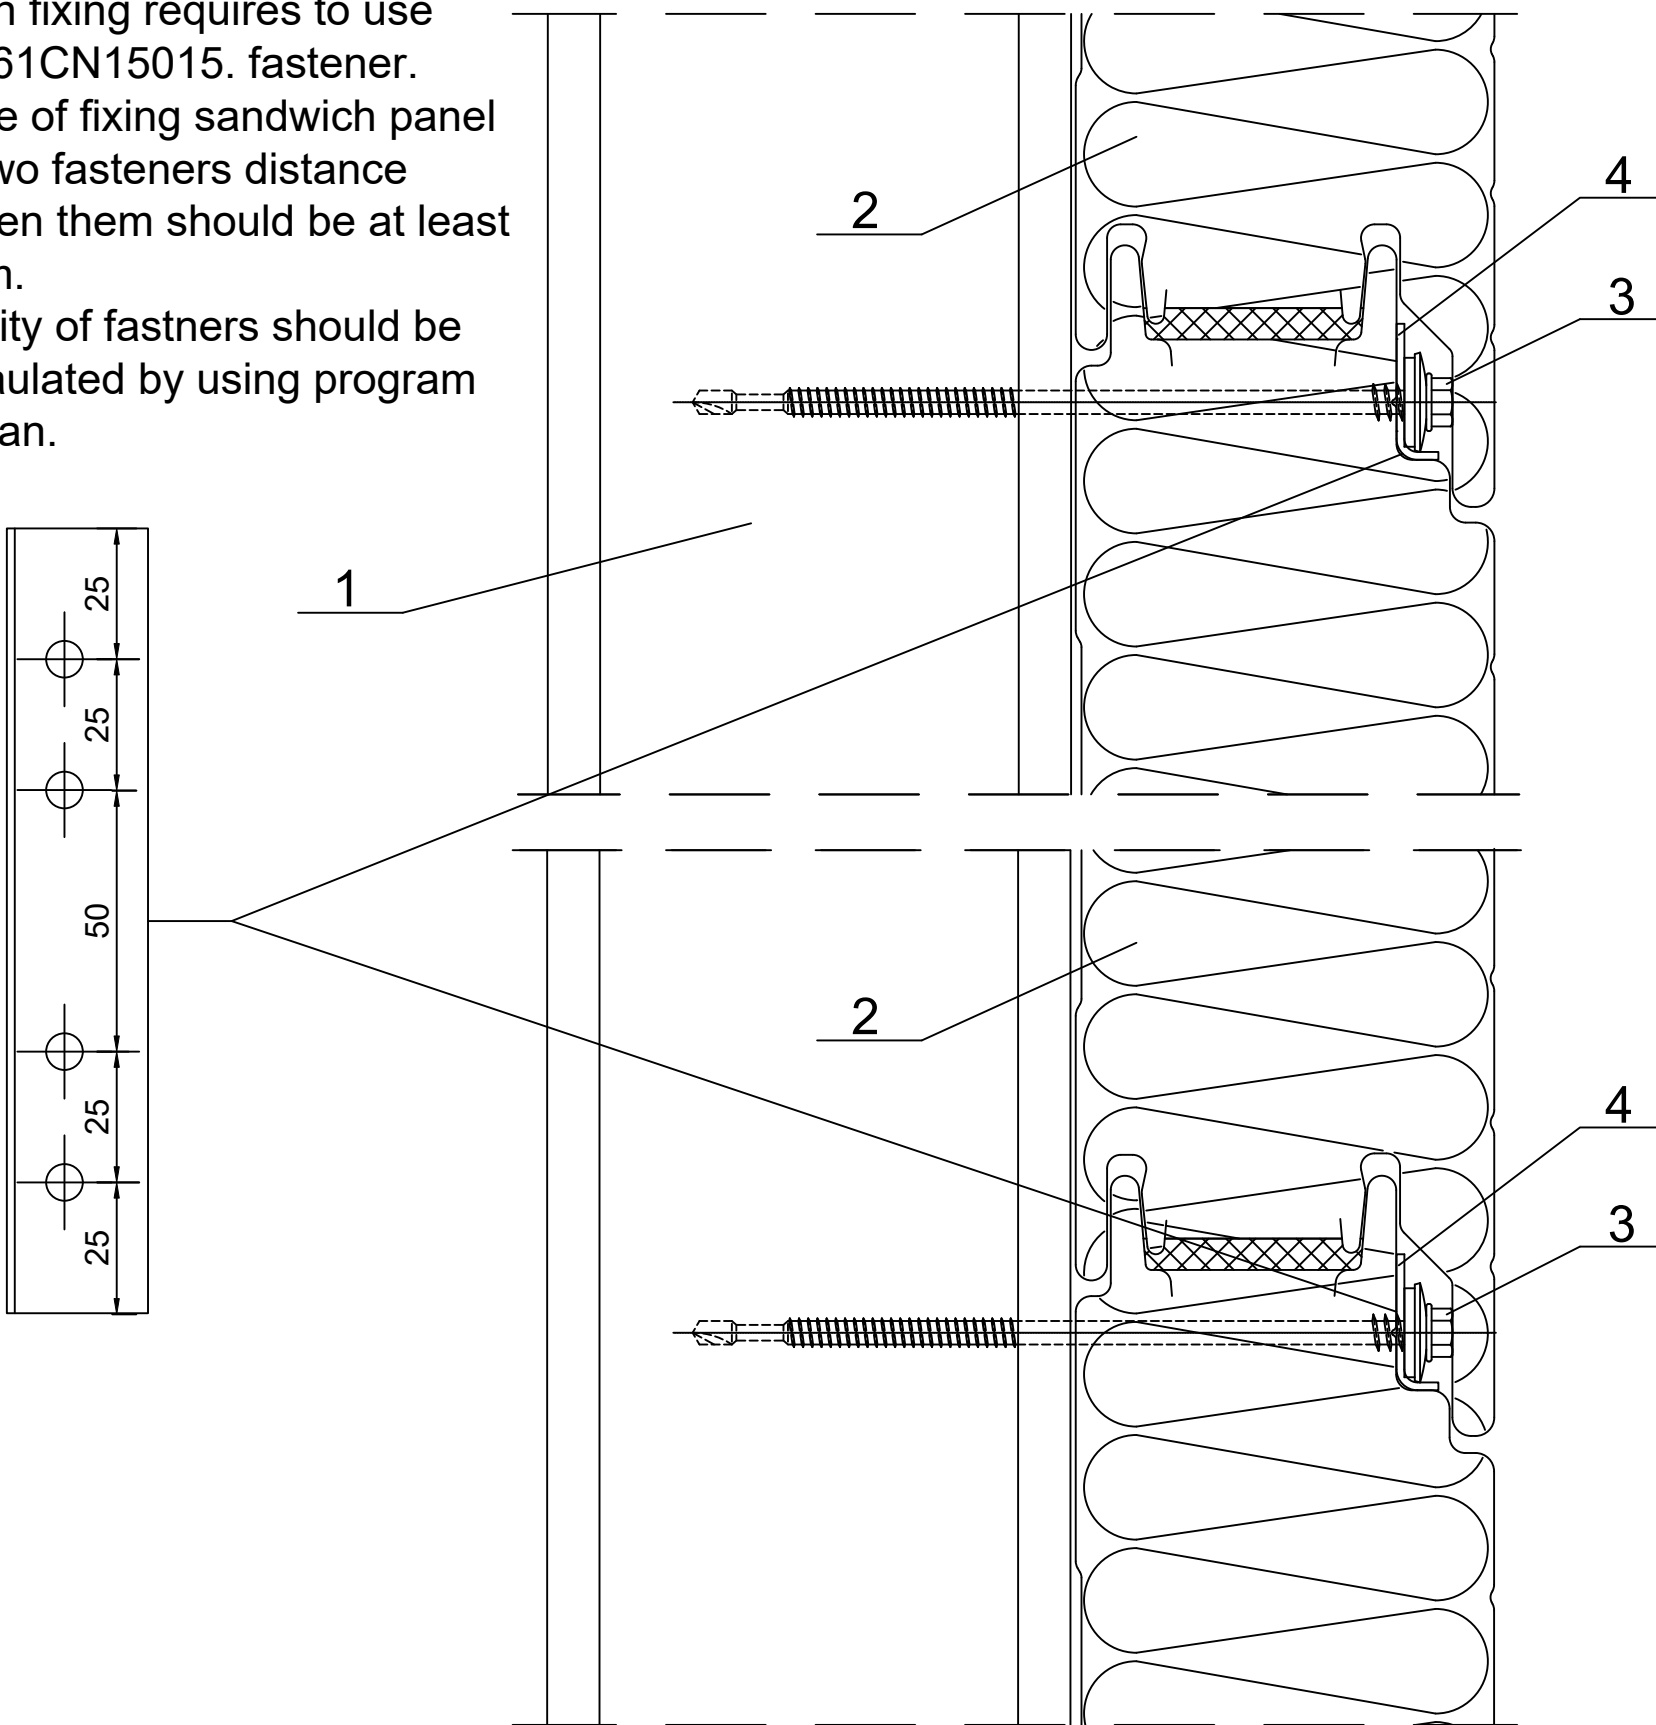

- 1. Steel column acc. to engineering design of the structure
- 2. Ruukki SP2D PIR
- 3. Panel fastener for hot-rolled column or for cold-bent column
- 4. Fastener EA1B61CN15015