




Contents of drawing
Joint between PCV window and Ruukki nSPB WS /
nSPB W / nSPB WF / nSPB WE / nSPB WEE and
steel sheeting rail (horizontal cross-section).
Horizontal panel arrangement.

Date	Rev. date	Work nr.	Drw. nr.	Rev.
Drawn by Ruukki	Rev.	N29/S31	-	
Scale 1:2	Building		File nr. P2021/001-00035	

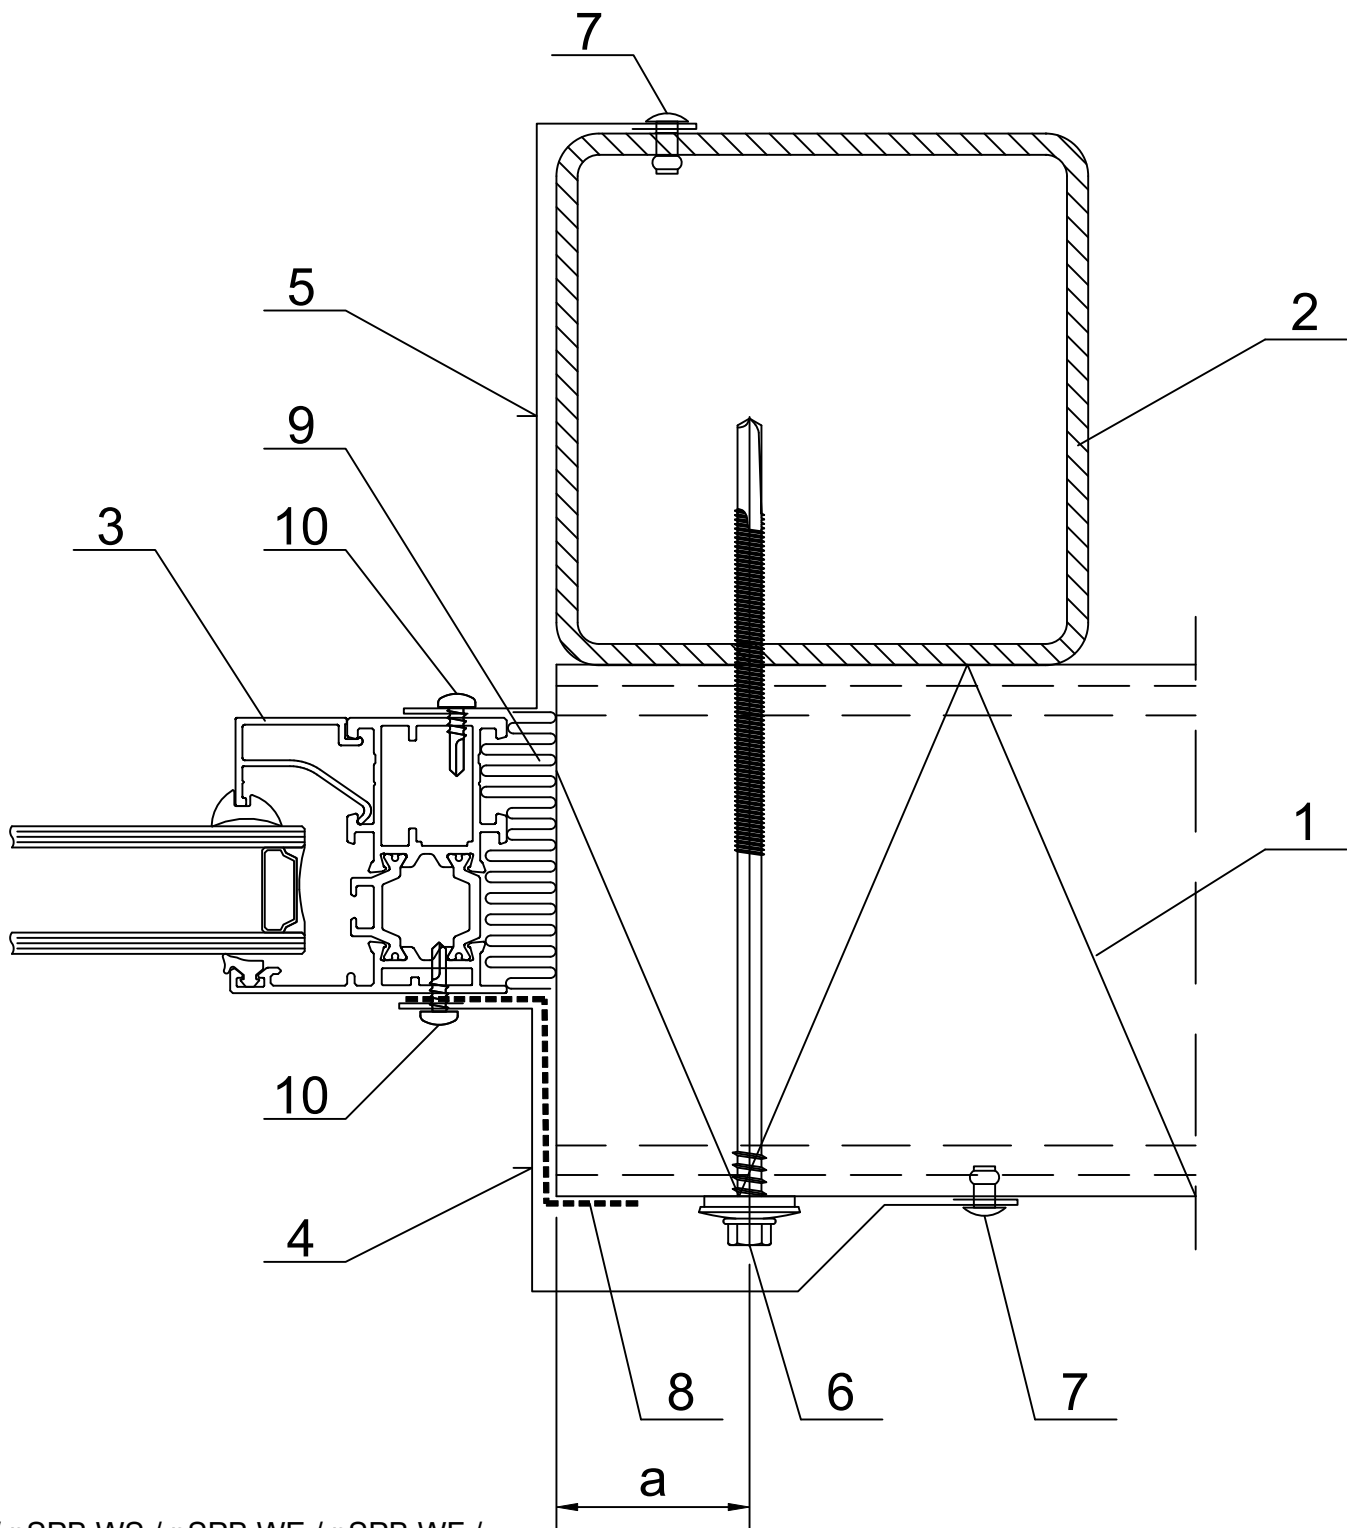

- 1. Ruukki nSPB W / nSPB WS / nSPB WE / nSPB WF / nSPB WEE.
- 2. Steel column acc. to engineering design of the structure.
- 3. PCV window.
- 4. Custom ordered flashing .
- 5. Custom ordered flashing .
- 6. Panel fastener for hot-rolled sheeting rail or for cold-bent sheeting rail.
- 7. Steel rivet(every 300mm).
- 8. EPDM tape.
- 9. Loose mineral wool.
- 10. Screw or rivet - acc. to woodwork supplier.

panel thickness [mm]	min. distance from the panel edge "a" [mm]
< 150	30
≥ 150	40